

EVX 12170 12 17


EVX 12170 - (400 100% 1800 30%)



12 (6)			
17A 20-	U	-1.75 /	25°
5.67			
230A (5)			
13.3			
		-15°	+50°
		-15°	+40°
		-15°	+40°
25°			
13.5 - 13.8		25°	
5.1 A ()			
			I _{max}
14.4 - 15.0		25°	
		25°	6- *
			5
ABS			



181.0±2.0	76.2±1.0	167.0±2.0	167.0±2.0
-----------	----------	-----------	-----------

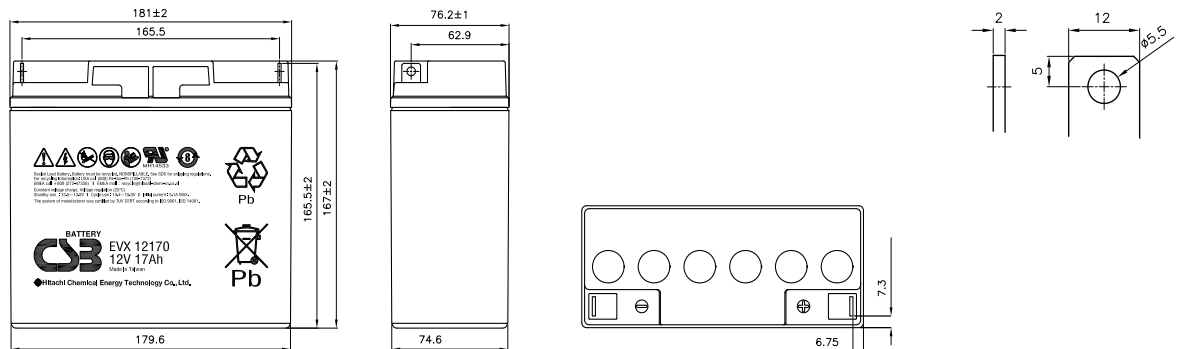

: A (25°)

U _k /T	30	45	60	90	2	3	4	5	6	8	10	20
1.60	17.0	12.7	10.3	7.34	5.94	4.43	3.55	2.92	2.51	1.98	1.63	0.93
1.67	16.5	12.3	9.94	7.14	5.77	4.28	3.43	2.84	2.44	1.92	1.58	0.90
1.70	16.0	11.9	9.67	6.91	5.62	4.16	3.34	2.76	2.37	1.87	1.54	0.88
1.75	15.5	11.6	9.38	6.70	5.43	4.04	3.24	2.68	2.30	1.81	1.49	0.85
1.80	15.0	11.2	9.08	6.48	5.25	3.91	3.14	2.59	2.22	1.75	1.44	0.83
1.85	14.5	10.8	8.79	6.27	5.09	3.79	3.04	2.51	2.15	1.69	1.39	0.80

: / (25°)

U _k /T	30	45	60	90	2	3	4	5	6	8	10	20
1.60	204	152	123	88.1	71.6	53.1	42.6	35.0	30.1	23.8	19.6	10.8
1.67	198	148	120	85.5	69.5	51.3	41.3	34.1	29.3	23.1	18.8	10.4
1.70	192	143	116	82.9	67.9	49.9	40.1	33.1	28.4	22.4	18.5	10.2
1.75	186	139	113	80.4	65.5	48.4	38.9	32.1	27.6	21.7	17.9	9.90
1.80	180	134	109	77.8	63.3	46.9	37.7	31.1	26.7	21.0	17.3	9.59
1.85	174	130	106	75.3	61.4	45.4	36.5	30.1	25.8	20.3	16.7	9.29